

Mex[®] CLASSIC-C1

TECHNICAL DATA SHEET

Mex-Classic C1, made from martensitic stainless steel C1, is a screw specifically developed for fastening wooden components to support wooden structures.

The screw features a rounded head, milling and driving threads, a Torx profile, and many other advantages.

Description and Benefits of the Mex-Classic C1


TORX PROFILE: Transmits greater torque

SCREW SHAFT: Reduces friction and installation torque, increases resistance to breakage, and ensures efficient power transmission

MARTENSITIC STAINLESS STEEL C1: High-strength steel with good mechanical resistance. It is corrosion-resistant in less aggressive environments and withstands typical weather conditions excellently

+ PASSIVATION PROTECTION: Enhances corrosion resistance

SUITABLE USE: Ideal for mounting wooden components to support wooden structures and outdoor furniture in mild outdoor conditions. It is best used with wood types with low tannin content, which provides a long service life and reliable performance



ROUNDED HEAD: The smaller, rounded head ensures an aesthetically pleasing, unobtrusive appearance when countersunk into wood

MILLING THREAD: Reduces friction and resistance during screwing, minimises the risk of wood splitting, effectively removes chips, and ensures a firm hold of the screw in the material

DRIVING THREAD: Allows quick screwing of wooden components to support wooden structures

TIP: Equipped with a notch for easier screwing

Mex[®] CLASSIC-C1

Material Description – Stainless Steel C1

- ✓ Suitable for softwood species and woods with low tannin content, such as pine, spruce, larch, etc.
- ✓ **Surface treatment by passivation** increases corrosion protection
- ✓ **High durability:** C1 is martensitic stainless steel, hardened, and has 50% higher breakaway torque than austenitic stainless steel A2 and A4
- ✓ **Limited corrosion resistance:** Stainless steel C1 is not suitable for use in aggressive environments, such as areas with high salt or chlorine content
- ✓ Magnetic properties



SOFTWOOD
APPLICATIONS



HIGH STRENGTH
OF THE SCREW



DECKING
APPLICATIONS



GENERAL USE FOR WOOD
CONSTRUCTIONS



MAGNETIC PROPERTIES
OF THE SCREW



Mex-Classic C1 is intended for:



Softwood species

- ✓ Spruce
- ✓ Siberian Larch*
- ✓ Silesian Larch*
- ✓ Pine (with and without pressure treatment)

Note: This recommendation may not apply to all usage scenarios. The properties and lifespan of the screw can be influenced by specific environmental conditions. Therefore, we recommend consulting with your dealer.

** It is possible to use, but we recommend consulting with your dealer.*

Mex[®] CLASSIC-C1


Decking Screw Offer

Art. No.	Screw Name	Size	Torx	Packaging
3235C1CLAS	Mex-Classic-C1	3,2x35 mm	TX15	200 pcs
440C1CLAS	Mex-Classic-C1	4,0x40 mm	TX15	200 pcs
550C1CLAS	Mex-Classic-C1	5,0x50 mm	TX25	200 pcs
560C1CLAS	Mex-Classic-C1	5,0x60 mm	TX25	200 pcs

During installation, it is recommended to pre-drill holes for the screws to ensure accuracy and reduce the risk of material damage.



With Pre-drilling

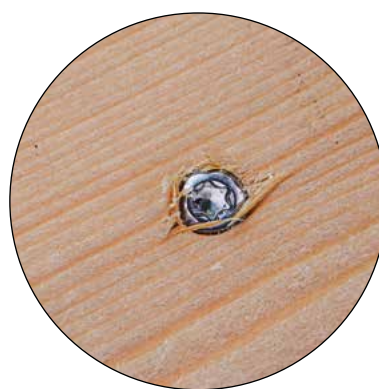

Without Pre-drilling